



Europäisches
Patentamt

European
Patent Office

Office européen
des brevets

EPO - DG 1

19. 07. 2004

(78)

Bescheinigung


Certificate

Attestation

Die angehefteten Unterla-
gen stimmen mit der
ursprünglich eingereichten
Fassung der auf dem näch-
sten Blatt bezeichneten
europäischen Patentanmel-
dung überein.

The attached documents
are exact copies of the
European patent application
described on the following
page, as originally filed.

Les documents fixés à
cette attestation sont
conformes à la version
initialement déposée de
la demande de brevet
européen spécifiée à la
page suivante.



Patentanmeldung Nr. Patent application No. Demande de brevet n°

03077091.1

PRIORITY DOCUMENT
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH
RULE 17.1(a) OR (b)

Der Präsident des Europäischen Patentamts;
im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets
p.o.

R C van Dijk

BEST AVAILABLE COPY



Anmeldung Nr:
Application no.: 03077091.1
Demande no:

Anmeldetag:
Date of filing: 04.07.03
Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

Bekaert VDS
E3 Laan 75-79
9800 Deinze
BELGIQUE

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:
(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.
If no title is shown please refer to the description.
Si aucun titre n'est indiqué se référer à la description.)

Target assembly

In Anspruch genommene Priorität(en) / Priority(ies) claimed / Priorité(s)
revendiquée(s)

Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/
Classification internationale des brevets:

G23C14/00

Am Anmeldetag benannte Vertragstaaten/Contracting states designated at date of
filing/Etats contractants désignées lors du dépôt:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IT LU MC NL
PT RO SE SI SK TR LI

Field of the invention.

The invention relates to a target assembly comprising a central body in a rotatable target tube.

Background of the invention.

5 The use of rotatable targets for large area plasma deposition of thin films onto e.g. window glass has become widespread. Metallic deposition - under an inert gas atmosphere - as well as the deposition of compound materials - when a reactive gas is mixed with the inert gas -
10 are performed on an industrial scale in large sputter deposition installations. One of the key components in this process remains the target assembly, which has to fulfil all of the following functions:

- It has to keep the magnetic field source in place. The generated magnetic field at the outside of the tube confines the electrons in a
15 narrow closed loop track leading to an increased ionisation of the inert gas atoms.
- The assembly must support the target tube rotatably.
- The target surface must be rotated in front of the magnetic field source so that each segment of the tube can be exposed to the
20 plasma thus eroding in a uniform way all the target material at the outside of the tube.
- The target surface must be kept at a negative potential with respect to the chamber. This potential accelerates the positive ions in the plasma towards the target surface thus ejecting the atoms from the
25 target into the chamber. As this leads to neutralisation of the target a negative electrical current must be maintained towards the target in order to maintain this potential.
- The target assembly has to be cooled because the dense bombardment of the surface leads to an intense heating that would
30 quickly lead to damage of the target assembly and/or melting of the target material.
- The target assembly must be vacuum tight in order to prevent the contamination of the deposition chamber and maintain gas composition.

While each of these functionalities are relatively simple to attain individually, the combination of all of them in a single assembly is a technological problem in its own right.

An assembly described in US patent 5 096 562 solved the problem by dividing the functionalities as follows:

- Within the removable target tube the magnets were mounted on a stationary coolant feedthrough.
- A first end-block was so designed that it allowed for the transmission of rotary movement and the supply and withdrawal of coolant by means of a rotary coolant seal to the target.
- A second end-block at the other end of the target tube contained the rotary connection of electrical current

Cantilever mounted rotatable targets – as described in e.g. US 5 200 049 – integrate all functions into one bearing housing having one end extending into the chamber and the other end located outside the chamber. The cantilever bearing housing must be mounted on a wall perpendicular to the axis of the target.

While these designs made the use of large target tubes practical, the end blocks or the bearing housing have a serious drawback in that they occupy a substantial part of the chamber which cannot longer be used for deposition of material, but anyhow has to be pumped vacuum. Moreover, they decrease the useable deposition width of the installation. In case of a cantilever target assembly the usage becomes more difficult if it is the intention to mount the magnetron along the length of and on a removable cover, door or lid.

In addition, the voluminous end-blocks or the bearing housing inhibit the use of rotatable target tubes in smaller size installations. In these smaller installations in many cases a planar target is used which has the drawback that it needs to be replaced more frequently (once every 4 to 5 days) compared to rotatable targets (replacement every 3 to 4 weeks).

Summary of the invention.

It is a general object of this invention to do away with the drawbacks of the prior art. It is a first object of the invention to minimise the space requirements of the end-blocks. On installations where now prior art end-blocks are used, the invention thus allows for a better use of the vacuum space and in particular the width of the chamber. It is a further object of the invention to enable the use of rotary targets in small sized installations where now only planar magnetrons can be used. The invention can thus reduce the replacement rate of the target and improve the use of the target material thus saving cost and time in these smaller sized installations.

The invention relates to the combination of features as described in claim 1. A target assembly comprising a central body in a rotatable target tube is claimed. In the central body, at least one of the functionalities, which in the prior art are incorporated into the end-block, is now implemented inside the target tube. These functionalities are at least one of the following:

- (1) a bearing system for rotatably supporting the tube by the central body
- (2) a drive means for rotating the tube
- (3) an electrical contact for electrically connecting the tube to the body
- (4) at least one rotatable coolant seal for supplying and extracting coolant to the tube
- (5) at least one rotatable vacuum seal for enabling a vacuum outside said tube

It will be clear that any combination out of these five functionalities is also subject matter of the present invention. In case the target assembly is used in a magnetron deposition apparatus, a magnet array is obviously understood to be incorporated into the tube as well.

The bearing system can be any suitable bearing system that is appropriate to carry the load associated with the total assembly. The

bearing system is mounted in the interior of the target tube. The bearing system could be mounted between the central body and the target tube, but preferably it will be incorporated into the central body. In this way the central body comprises a stationary part connected to the chamber and
5 a rotatable part turning with the target tube. As non-delimiting example, one can think of targets that are operated in a horizontal position. There, ball bearings or roller bearings will be more appropriate for larger spans. For smaller spans a plain bearing will do. In case the target is mounted vertically, a tapered roller bearing will be preferred for the lower bearing,
10 while a pivot bearing may suffice to support the topside of the tube.

With 'drive means' is meant that device which transforms any form of non-mechanical energy into mechanical rotation. The drive means must allow for a rotational speed of at the most 60 rotations per minute. An
15 adjustable speed is preferred although not necessary.

In case of DC cathodic operation, negative charge has to be fed continuously to the target tube. This is according the present invention achieved by mounting an electrical contact between the body and the
20 tube inside the tube. The contact is ensured through an electrically connecting brush, bushing or slip ring of e.g. copper filled graphite or any other material known in the art for this purpose. Also the brush can be spring activated in order to ensure a good electrical contact. An electrical contact through a fluid – e.g. the coolant - is a possible
25 alternative. The maximum current to be transferred by this connection is dependent on the magnitude of the installation. Typically – without being delimited – is a value of at the most 400 A. The case of AC operation – in which the target is alternatively positively and negatively charged – or pulsed DC operation – in which the DC operation is interrupted
30 according a pattern - is also included. Use of the target assembly as a positively charged anode, for example to coat the bare tube with material or as a collector of electrons on a periodic or continuous base, is explicitly included in the invention.

Coolant is supplied and extracted continuously to the inner surface of the tube in order to keep the assembly at an acceptable temperature level (typically below 45°C). Coolant supply and extraction can be situated at the same side of the target tube or the supply can be at one side and the extraction at the other. The former is preferred since then only one coolant seal can suffice provided the coolant supply and extraction are done through e.g. concentric tubes. The function of the coolant seal is to keep the coolant inside the tube, while enabling a rotary movement between the stationary and rotatable part of the central body.

Coolant is preferably water, although other coolants could be envisaged as well as long as they fulfil the requirements of heat capacity, electrical conductivity and viscosity. The coolant is supplied at a pressure of typically 5 bar and at a rate which is dependant on the power rating of the deposition installation which is itself a function of the magnitude of the installation. Typically lip seals are used as coolant seal as they are well known in the art. However, other types of seals like mechanical face seals or labyrinth seals - without being exhaustive - are not excluded.

In order to maintain vacuum and/or the low pressure gas composition in the chamber no air should be able to leak into the chamber. Again the transition between the stationary and rotating part of the central body is ensured by means of a vacuum seal. This seal is either based on lip seal type of assemblies and/or ferrofluidic seal types. The former relies on mechanical squeezing of a high performance elastomer against the other rotating part (as in the case of the coolant seal). The latter's working principle is based on the formation of a fluidic ring between the shaft and a pole shoe fitting the shaft. The fluid - which contains finely dispersed magnetic particles - is held between shaft and pole shoe by means of the magnetic field. When the target tube is mounted in a cantilevered way, one vacuum seal would suffice. In case the target tube is held at both ends, two vacuum seals are preferred.

In the above the functionalities - of which at least one has to be incorporated inside the target tube - have been discussed separately. Nowadays, combinations of different functionalities can be bought integrated in one package. For example, it is possible to obtain vacuum
5 seals in which also bearings are incorporated. Or electrical brushes that are isolated from external liquids which hence also can be used as coolant seal. It is clear that these combinations fulfil the requirement also as put forward in claim 1.

10 In the dependent claims, different embodiments of the invention are defined which will now be discussed in more detail.

As a drive means an electrical motor can be used (claim 2). This motor is preferably of the fixed axis, rotating drum type (claim 3), since this
15 simplifies the mounting of the motor.

As an alternative to an electrical motor, a hydraulic rotary motor is also possible (claim 4). More preferred is the use of the circulating coolant as the propellant for this hydraulic motor, thus further simplifying the
20 concept (claim 5).

While the above focuses on the target assembly as such, the assembly has also to be fixed to the walls of the sputtering apparatus (independent claims 6 and 7). It is not excluded that the whole
25 sputtering apparatus is mounted for example to an access door or lid of the vacuum chamber. The fixation to the apparatus is done by coupling means. These coupling means distinguish themselves from the prior art end-blocks in their simplicity and relative smallness. Indeed the coupling between the central body and the coupling means contains no moving
30 parts: the coupling means have only to keep the stationary part of the central body fixed with respect to the chamber and to provide a stationary feedthrough of electricity for charging the target surface, of coolant and of electricity for the drive means (if needed). In which one of

the two coupling means these feedthroughs are organised is of course dictated by how the functionalities inside the central body are organised.

5 By way of non-delimiting example, the electricity to charge the surface can be supplied at the same side where the coolant is supplied while the electricity to energise the drive means (if needed) is supplied on the other side.

10 If the central body is so organised that all supply feedthroughs are e.g. available at a first coupling means to the central body, the task of the second coupling means limits itself to holding the central body itself. In the limit (claim 7) this second coupling can be completely eliminated in case the mechanical strength of the first coupling is sufficient to hold the target assembly in place.

15 The central body can also be separated into a first and a second central body that are mechanically detachable from one another (claim 8). In this way both bodies can be inserted separately from one another at both ends of the target tube. The functionalities can be divided between both bodies in the most convenient way, as long as at least one of them is incorporated inside the target tube. The first and the second central body can – by way of example – be mechanically coupled to one another by means of the magnet array (claim 9). These embodiments are also envisaged in the invention. Again coupling means for coupling 20 the first and second central body have to be provided in the magnetron apparatus (claim 10). The case where one side of the target assembly holds the tube is also included (claim 11).

Brief description of the drawings.

30 The invention will now be described into more detail with reference to the accompanying drawings wherein

- FIGURE 1: Is an overview of a first preferred embodiment of the target assembly including the coupling means, in a front view and a side view.

- FIGURE 2 : is a cross section of the first preferred embodiment according plane AA' of FIGURE 1
- FIGURE 3 : is a cross section according line BB' of FIGURE 1
- FIGURE 4 : is a cross section according line CC' of FIGURE 1;
- 5 - FIGURE 5 : is cross section of a second preferred embodiment where the drive means is hydraulic rotary motor driven by the coolant.

In the figures identical reference numbers will be used for the same parts occurring in different cross sections.

10 **Description of the preferred embodiments of the invention.**

As the working principle of rotatable target assemblies is generally known in the art, focus will be given to the detailed description of the invention of which a first preferred embodiment is represented in

15 FIGURE 1.

In this embodiment all the functionalities as enumerated in claim 1 are incorporated inside the target tube. The drive means is an electrical motor. The supply and extraction of the coolant and the charging of the surface is through the first coupling means 010. The electricity to drive

20 the electrical motor is fed through the second coupling means 020. FIGURE 2 shows the carrier tube 100 and the rotating tube 200. The rotating tube 200 can be made of the target material itself e.g. aluminium tube. Or the target material can be disposed at the outside of the rotating tube. It can be applied onto the tube 200 by means of

25 thermal plasma torch spraying, or by electrolytic deposition, or by any other technique known in the art. The total length of the tube can be chosen at will by increasing or decreasing the length between the wavy lines 002. At both ends of the tube 200 an insert 210 and 220 can be slid into the tube 200 thus forming a central body together with the

30 carrier tube 100. For convenience we will refer to the first side of the tube as that side coupled to the first coupling means 010 and the mutatis mutandis for the second side.

The carrier tube 100 (FIGURE 3) comprises an extruded Duraluminum double walled tube where the inner tube 114 is connected to the outer

5 tube 110 through six ribs 112. This is the main carrier structure to which the other parts are connected. The magnet holder 120 is mounted to the outer side of the carrier structure 110. Permanent magnets 122 are arranged onto this holder 120. Suitable magnetic arrangements have been described in WO 99/54911. The target assembly is rotatable supported by 4 bearings 130,132,134 and 136 (FIGURE 2) which are incorporated inside the central tube 114 of the double walled tube. The drive means, in this case a rotary shaft electrical motor 140, is mounted inside a cylindrical housing 142 which is capped with a circular lid 144 at the outer side of the target assembly. A feedthrough piece 146 acting also as the axis for rotatably supporting the tube is used to supply power leads 148 to the motor. At the other side of the motor housing the shaft is fed through a circular fitting piece 150. The shaft of the motor 154 is fastened to a closing piece 222 for the insert 220. This closing piece 222 is made of an electrically insulating material in order to electrically insulate the motor 140 from the insert piece 221 which is at the potential of the tube. In addition a mechanical connector 152 for absorbing start and stop shocks and a bearing 156 to increase the mechanical stability of the design are mounted between fitting piece 150 and closing piece 222. Also an insulating bushing 224 is introduced between the second insert 220 and feedthrough piece 146 in order to insulate the motor 140 and second coupling means 020 from the target potential. Additional electrical insulation is obtained by introducing an insulator plate 022 between the chamber wall 999 and the second coupling piece 020. The electrical contact for electrically connecting the target tube to the target power supply is incorporated into the first insert 210. The insert piece 211 rotates around the axial tubular piece 160. Power is transferred through the first coupling means 010 and the first insert 210 to the rest of the tube. This means that first coupling means 010 is at the higher potential of the target tube. An insulator 012 has therefore been introduced between the first coupling means 010 and the vacuum chamber wall 999. Electrical contact is ensured through the stationary brush 164 that is spring loaded against the rotating bushing 166. It is evident that the materials used for the different parts should be

conductive such that an electrical path of sufficient current capacity can be formed between the first coupling 010 and the surface of the target tube 200. When the applied voltage is negative, the target tube 200 acts as a cathode, e.g. for accelerating positive ions towards its surface.

5 When the applied voltage is positive, the target tube 200 acts as an anode, e.g. for collecting electrons.

The coolant is supplied through the first coupling means 010. A series of arrows 004 indicates the track followed by the coolant. FIGURE 4 gives a cross section of the first coupling piece 010 to the first insert 210. The
10 coolant is fed through a bore hole 014 in the middle of the first coupling means to a tube 168 which is coaxially mounted to the axial tubular piece 160. The cold coolant going into the target assembly is separated from the warm coolant returning from the target assembly through a separator 172 which is mounted between inner 114 and outer tube 110
15 of the carrier tube 100. The central feed tube 168 feeds directly into the carrier inner tube 114 where the coolant is further guided towards the second side of the tube. There the flow reverses and the coolant is pressed towards the first end of the tube thus cooling the hot outer target tube 200. At the first end the flow is again reversed and led into
20 the cylindrical, coaxial gap between the tube 168 and the axial tubular piece 160 through the exit holes 169. The design necessitates only one water seal 170, which is a lip seal. The warm coolant is led through a borehole 016 (FIGURE 4) sideways from the entrance borehole 014. The vacuum seal is necessary in order to guarantee the vacuum or the
25 low pressure gas composition. In this preferred embodiment this is achieved by introducing vacuum seals 135 and 131 between the two pairs of bearings 134, 136 and 130, 132. In fact the vacuum seal and the bearing are part of an assembly which can be obtained preassembled.

30 FIGURE 5 depicts a second preferred embodiment in which the drive means is replaced by a hydraulic motor. As this particular embodiment is identical for the other functionalities (bearing system, electrical contact, rotatable coolant seal and rotatable vacuum seal) to that of the first embodiment the clarification of FIGURE 5 will be focused on the

hydraulic motor only. This motor is driven by means of the coolant itself. The flow of the coolant is therefore guided through the feed hole 312 into the hydraulic motor 310. In the motor, the kinetic energy of the flow is transformed into rotary movement. Upon exiting through the exit holes
5 322, the coolant is guided to the inside of the target tube 200 to further cool the tube. The rotating outer housing of the motor is affixed to the insert piece 221, while the axis of the motor 318 is fixed through a mechanical connector 316 that allows easy fixing of the motor axis to the central axis 320 as well as absorbs start and stop shocks. The
10 central axis 320 is immovably mounted to the second coupling means 020. The functioning of the motor can be based on guide vanes under angle as in a turbine or on the principle of an orbital motor or an inverted screw pump principle or any other principle known in the art. The principle of operation is however non-dellmiting to the invention.

15 There are some parts of the design which have not been referenced - although drawn - but the functioning of which in the design is clear to the person skilled in the art. For example where necessary, 'O'-ring seals have been incorporated in the design between pieces which are
20 immovable to one another. As another example an insulated shield protects the first and second coupling means. Also fastening means such as e.g. screws or positioning pins have not been enumerated exhaustively in order to keep the explanation understandable.

CLAIMS

We claim:

- 5 1. A target assembly comprising a rotatable target tube and a central body characterised in that said assembly further comprises inside said tube at least one of the following
 - a bearing system for rotatably supporting said tube by said body
 - a drive means for rotating said tube relative to said body
 - an electrical contact between said body and said tube
 - 10 at least one rotatable coolant seal for supplying or extracting coolant to said tube through said body
 - at least one rotatable vacuum seal for enabling a vacuum outside said tube
- 15 2. The target assembly according claim 1 wherein said drive means is an electrical rotary motor.
3. The target assembly according claim 2 wherein said electrical rotary motor is a fixed axis, rotating drum motor.
4. The target assembly according claim 1 wherein said drive means is a hydraulic rotary motor
- 20 5. The target assembly according claim 4 wherein said hydraulic rotary motor is driven by the coolant.
6. A sputtering apparatus positioned within walls of an evacuable chamber comprising a target assembly as in any one of claim 1 to 5, said apparatus further comprising a first and a second coupling means connected to said chamber walls for removably coupling said body to said first and second coupling means.
- 25 7. A sputtering apparatus positioned within walls of an evacuable chamber comprising a target assembly as in any one of claim 1 to 5, said apparatus further comprising one coupling means connected to said walls for removably coupling said body to said one coupling means.
- 30 8. A target assembly comprising a rotatable target tube and a first and a second central body characterised in that

said assembly further comprises inside said tube at least one of the following

a bearing system for rotatably supporting said tube by said first or said second body

5 a drive means for rotating said tube relative to said first or second body

an electrical contact between said body and said tube for electrically connecting said tube through said first or second body

10 at least one rotatable coolant seal for supplying or extracting coolant to said tube through said first or second body

at least one rotatable vacuum seal for enabling a vacuum outside said tube

9. The target assembly as in claim 8 wherein said first and second body are coupled to one another.

15 10. A sputtering apparatus positioned within walls of an evacuable chamber and a target assembly as in claim 8 or 9 said apparatus further comprising a first and a second coupling means connected to said chamber walls for removably coupling said first and second body to said first and second coupling means.


20 11. A sputtering apparatus positioned within walls of an evacuable chamber and a target assembly as in claim 8 or 9, said apparatus further comprising one coupling means connected to said chamber walls for removably coupling said first body to said one coupling means.

ABSTRACT

5 A target assembly is claimed for use in e.g. a magnetron deposition
apparatus. The target assembly is characterised in that at least one of
the functions - bearing of the tube, rotation of the tube, electrical
contact, coolant sealing and vacuum sealing - is integrated into the tube
itself. Such an assembly has the advantage that it better uses the
vacuum space by reducing the volume incorporated by the end blocks.
10 Due to the compactness of the assembly it can also be used in smaller
scale installations where now only planar target assemblies can be
used.

EPO - DG 1
04.07.2003

106

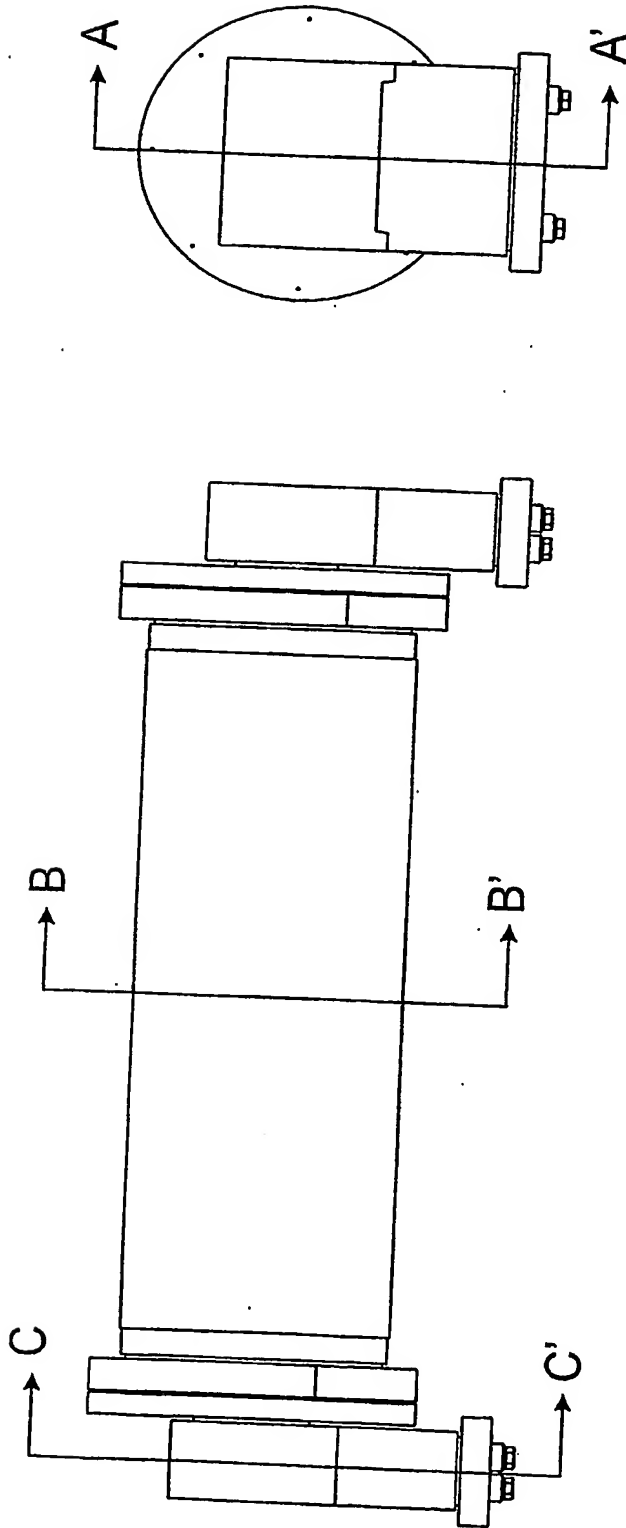

EPO - DG 1
04. 07. 2003

(106)

Fig. 1

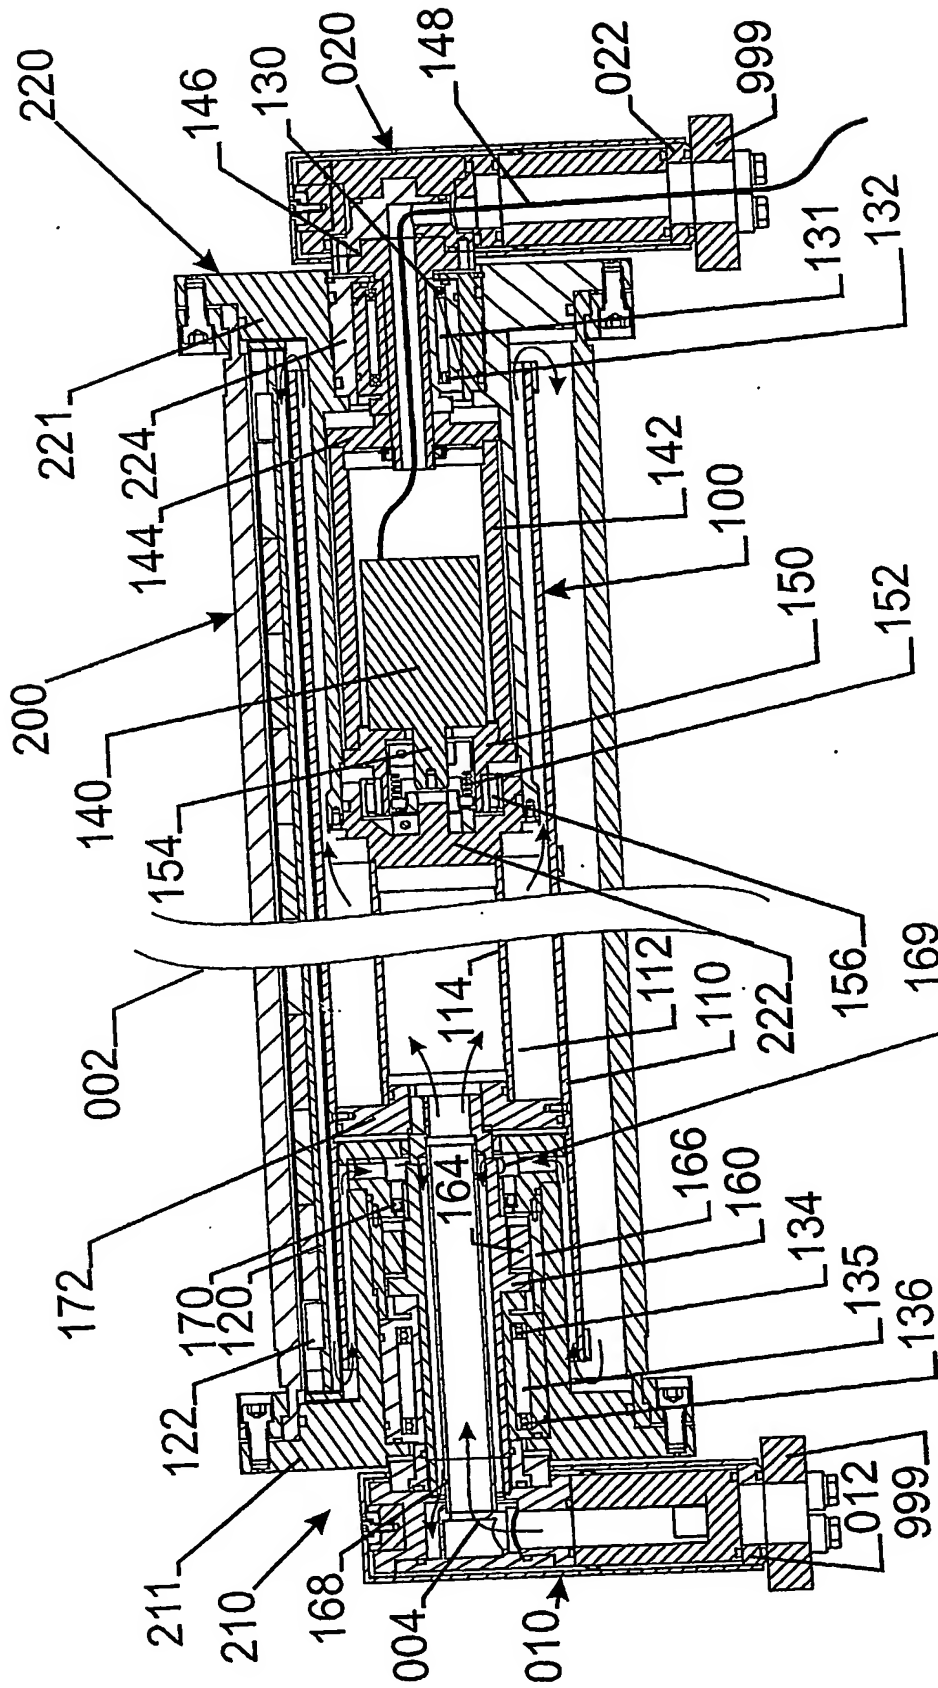


Fig. 2

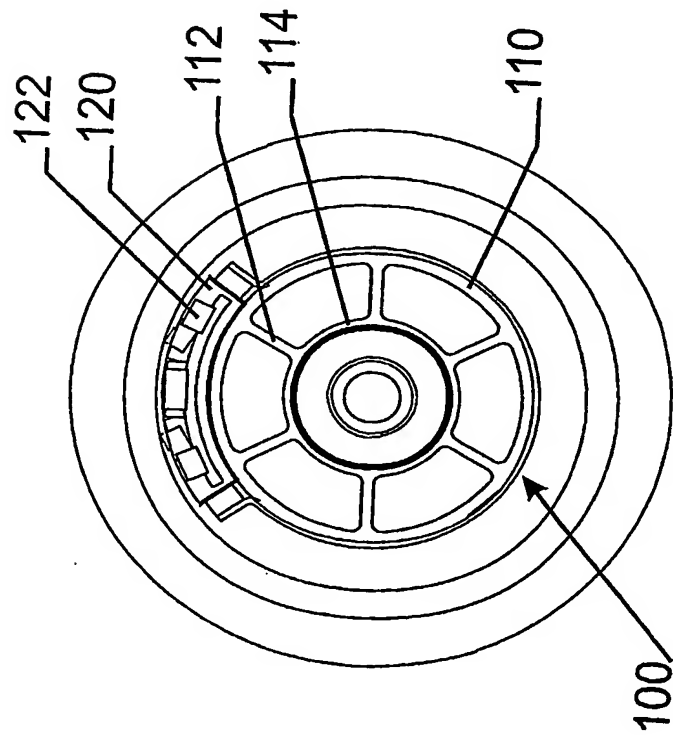


Fig. 3

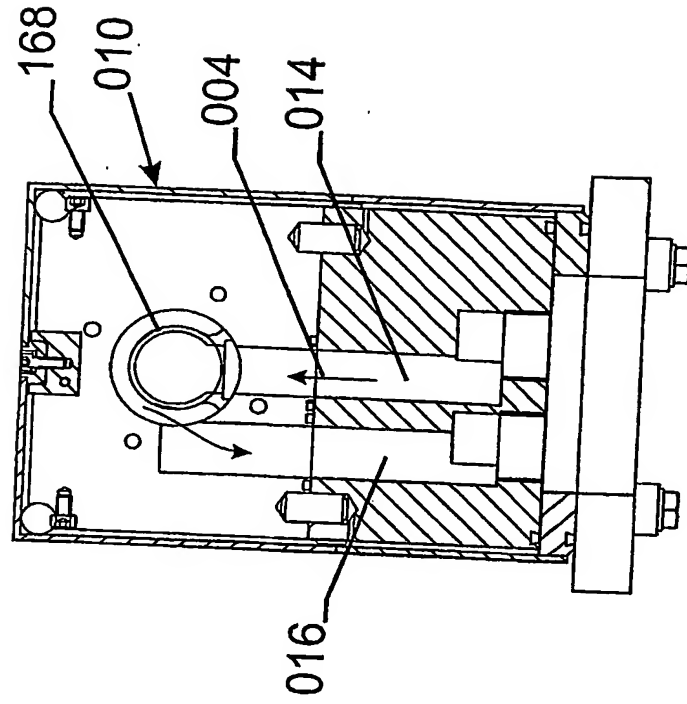


Fig. 4

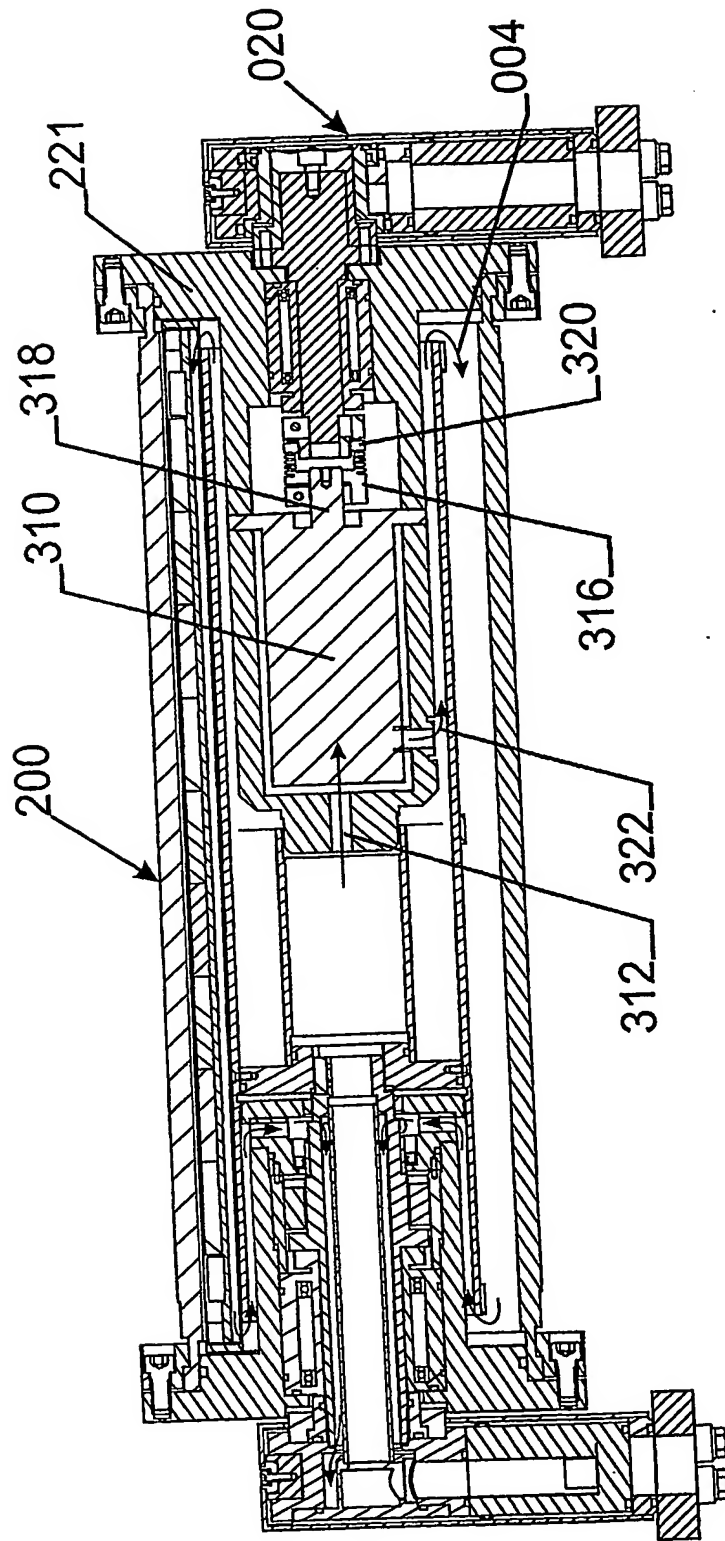


Fig. 5

PCT/EP2004/051247



**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.